

UNDER SINK WATER SOFTENING

The SPECTRUM SOFT-S1 provides high-quality water softening for residential and light commercial use, delivering a seamless and reliable experience. Its intuitive touch control programming allows selection between volumetric or timed regeneration, making it adaptable to different requirements.

A built-in blend feature lets users adjust water softness, providing fully softened water or a customized mix. The integrated brine tank fits neatly under sinks or in storage cupboards, saving space without compromising performance. Supplied with a complete installation kit including fittings and tubing, the SOFT-S1 ensures a smooth, hassle-free setup.


Experience cleaner, softer water with the SPECTRUM SOFT-S1, designed for efficiency, convenience, and optimal results.

FEATURES & BENEFITS



- **Touchscreen Control:** Easy to program and monitor.
- **Intuitive Programming:** Includes volumetric, timed regeneration, and holiday mode.
- **Adjustable Water Softness:** Provides fully softened or customised water.
- **Integrated Brine Tank:** Efficient space-saving design for easier installation.
- **Complete Installation Kit:** Includes fittings and tubing for hassle-free setup.
- **Versatile Operation:** Suitable for residential and light commercial applications.

DIMENSIONS

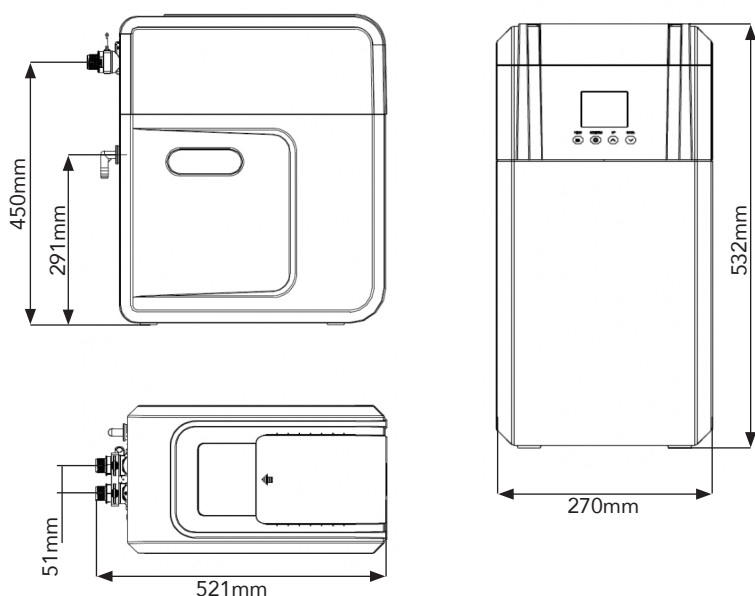

TECHNICAL DATA



Temperature Range (°C)	3 - 38
Operating Pressure Range (bar)	1.4 - 8.6
Electrical Requirements	110-240V 50/60Hz 12V AC 650mA
Softening Resin Included	SPECTRUM SRSO Salt available to order separately
Ports (")	3/4

SALT OPTIONS



The SPECTRUM SOFT-S1 is designed for complete salt flexibility, working seamlessly with all SPECTRUM water softener salts.

Tablet - the ideal choice for most standard softeners

Granular - preferred for larger or industrial systems

Block - perfectly suited to block-style softeners.



Available in
10 & 25KG

Available in
8KG (2x4KG)

FLOW RATE



Code	Optimal Flow Rate (lpm)	Resin Vessel Size	Total Hardness Capacity (mg)	Water Used Per Regen (L)*	Hardness (ppm)	Litres of Water Used Per Day (lpd)			
						500	1000	2000	4000
S1-S170	17	9" x 15"	377,000	47	100	7	3	2	1
					200	3	2	1	
					300	2	1		

Days Between Regen

* Based on feed temperature and optimal service flow rate

ORDERING GUIDE



Code	Size
S1	S170

e.g. S1-S170

PRODUCT RANGE



The below products have often been associated with this product.


SPECTRUM PURE Z1 RO