

STANDARD - UP TO 300 LPM

The smallest multi-cartridge housings for rugged environments start at a 3 x 10", offering an alternative solution to where a single round equivalent is at maximum flow. With 2" ports, flow and pressure is dispersed throughout these wide housings and across the multiple cartridges resulting in lower pressure drop and a more even distribution of particulate. Housings are equipped with gauge ports and drain ports as standard, with the supplied pressure gauges allowing for accurate differential pressure monitoring. The Glass Bead finish hardens the housing surface, increasing resistance to wear & corrosion.



PED
Compliant
Article 4, Paragraph 3, Group 2 Liquids

DWI
Approved

FDA
Compliant Materials

FEATURES & BENEFITS



- V-Clamp closure for a secure seal
- Universal cartridge adaptors securely hold 222, DOE or AA cartridges
- Drain ports allow for quick and easy cartridge change out
- Gauges ports come fitted with 316L plugs when gauges are not required

TECHNICAL DATA




Port Sizes (")	2 BSPT-M
Cartridge Compatibility (")	9¾ to 40
End-Cap Compatibility	EH, EG, DOE, AA
Pressure Rating (bar)	10
Temperature Rating (°C)	121

MATERIALS OF CONSTRUCTION




- Head & Body: 316L Stainless Steel
V-Band Clamp: 304 Stainless Steel
Legs: 304 Stainless Steel
O-ring: Buna-N

DIMENSIONS

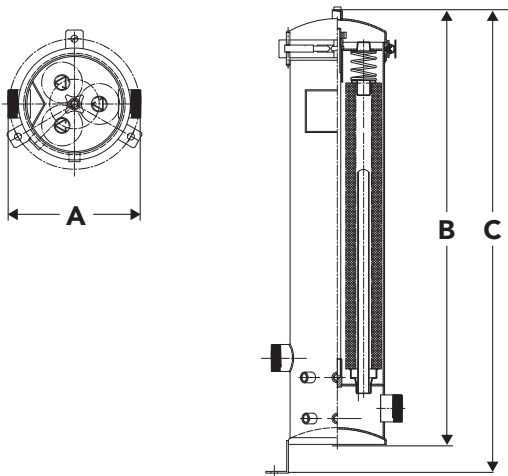

Dimensions (mm)			
Housing	A	B	C
SFH-SGB-3-10	237	517	568
SFH-SGB-3-20	237	771	822
SFH-SGB-3-30	237	1025	1076
SFH-SGB-3-40	237	1279	1330

FLOW RATE

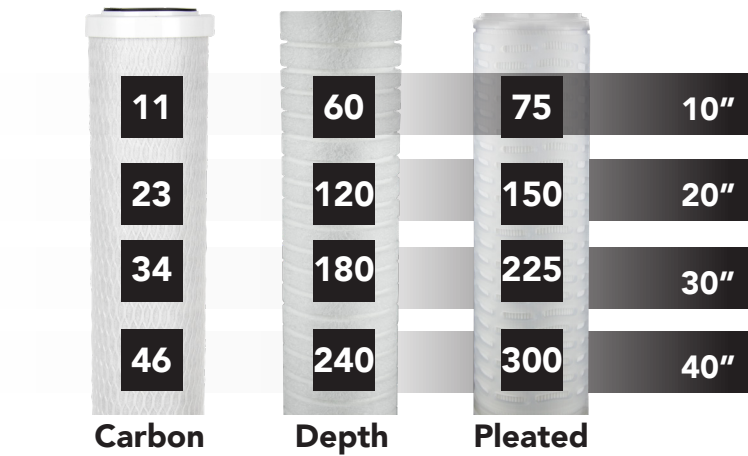

ORDERING GUIDE

Code	Material	No. of Cartridges	Cartridge (")	Port Size (")	Code
SFH	SGB	3	10	2	G
			20		
			30		
			40		

e.g. SFH-SGB-3-20-2-G

PRODUCT RANGE

The below products have often been associated with this product.

