


STANDARD - UP TO 500 LPM

An extension of the 3 round range, these 5 round housings take advantage of a nominal cost to increase body size, resulting in an increase in flow rate capacity of over 60%. As with the rest of the Standard range, these housings are supplied with gauge ports, with the supplied pressure gauges allowing for accurate differential pressure monitoring, as well as drain ports for effective housing emptying, for easy change out and reduced product wastage. The Glass Bead finish hardens the housing surface, increasing resistance to wear & corrosion.



FEATURES & BENEFITS

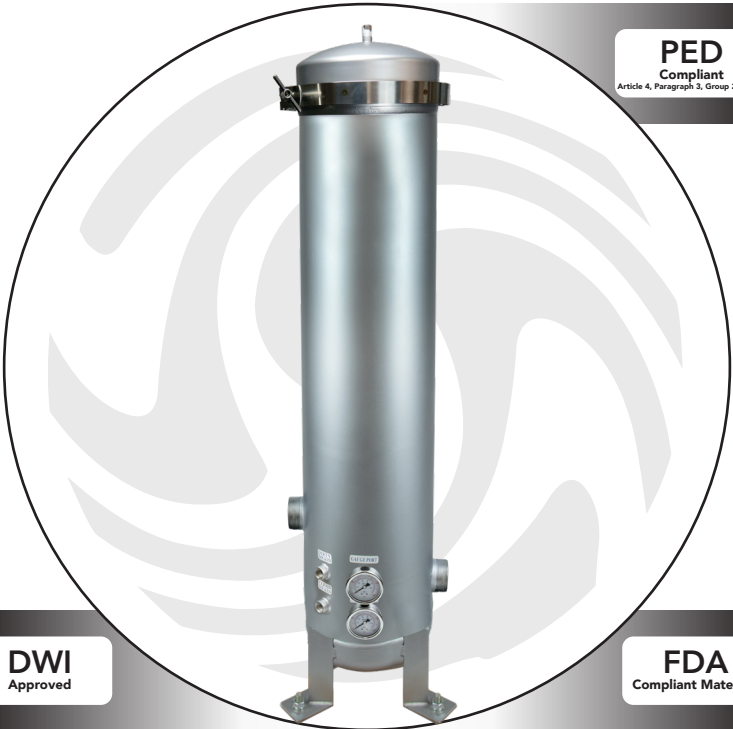

- V-Clamp closure for a secure seal
- Universal cartridge adaptors securely hold 222, DOE or AA cartridges
- Drain ports allow for quick and easy cartridge change out
- Gauges ports come fitted with 316L plugs when gauges are not required

TECHNICAL DATA




Port Sizes (")	2 BSPT-M
Cartridge Compatibility (")	9¾ to 40
End-Cap Compatibility	EH, EG, DOE, AA
Pressure Rating (bar)	10
Temperature Rating (°C)	121

MATERIALS OF CONSTRUCTION




- Head & Body: 316L Stainless Steel
V-Band Clamp: 304 Stainless Steel
Legs: 304 Stainless Steel
O-ring: Buna-N

DIMENSIONS

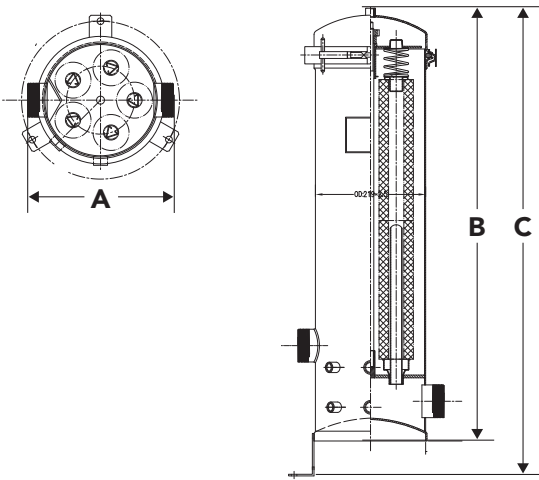

Dimensions (mm)			
Housing	A	B	C
SFH-SGB-5-20	285	793	857
SFH-SGB-5-30	285	1047	1111
SFH-SGB-5-40	285	1301	1365

FLOW RATE

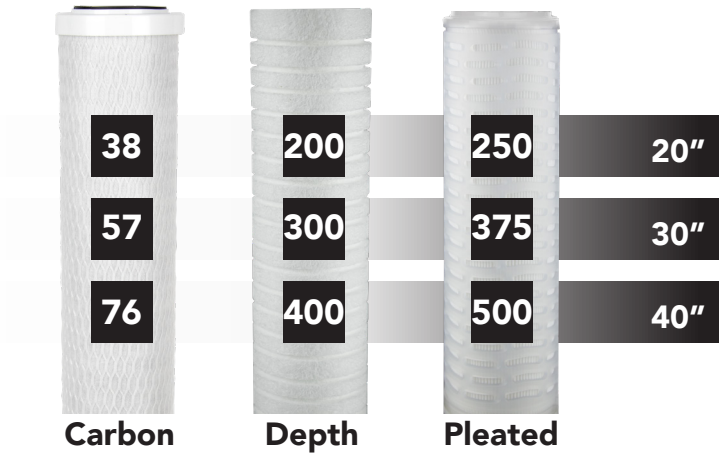

ORDERING GUIDE

Code	Material	No. of Cartridges	Cartridge (")	Port Size (")	Code
SFH	SGB	5	20	2	G
			30		
			40		

e.g. SFH-SGB-5-30-2-G

PRODUCT RANGE

The below products have often been associated with this product.

