
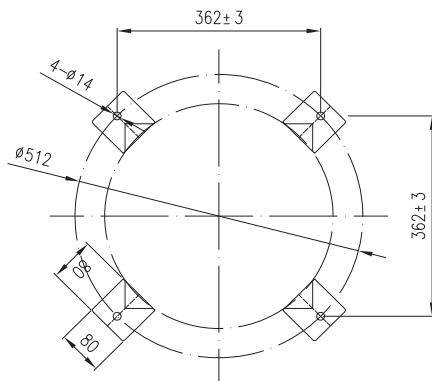
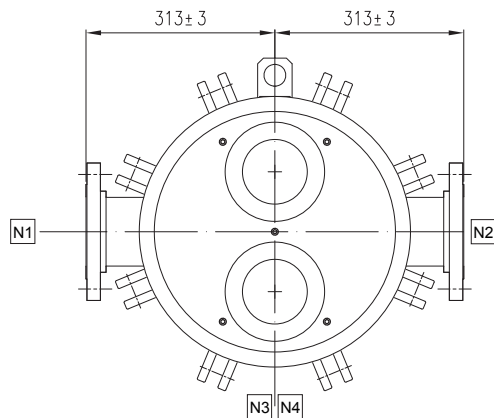


INOX PREMIER HIGH FLOW FILTER HOUSING
PFH-SGB-2HF-40-4F-GP-ML

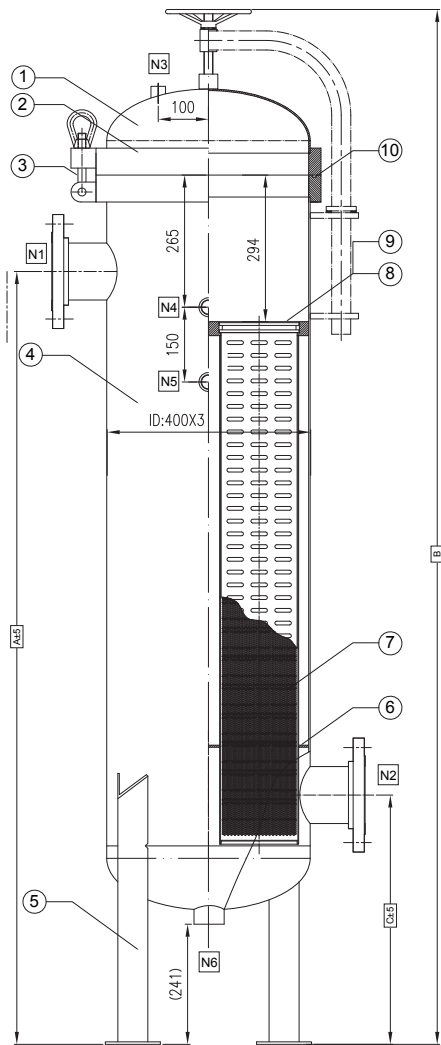

Overall Dimensions			
To Accommodate Filter Qty x Length	A mm	B mm	C mm
2 x 40"	1550	2076	500

Port Details					
No.	Type	Size	No.	Type	Size
N1	Inlet	DN100 PN10 (4" Flange)	N4	Gauge	1/2" BSPT-F
N2	Outlet	DN100 PN10 (4" Flange)	N5	Gauge	1/2" BSPT-F
N3	Vent	1/2" BSPT-F	N6	Drain	2" BSPT-F

Components					
No.	Name	Material	No.	Name	Material
1	Lid	316L	6	Support Plate	316L
2	Flange	304	7	Basket	316L
3	Eye Bolts (x8)	304	8	Basket Support	316L
4	Shell	316L	9	Hold Down Plate	316L
5	Legs	304	10	O-Ring	EPDM

Technical Information	Maximum Operating Temperature	121°C
	Design Pressure	7 bar
	Hydrostatic Test Pressure	10 bar

• Pressure relief device should be installed on the outer piping by the customer to assure that pressure in the vessel can not exceed the design pressure indicated

• All dimensions are approximate in mm